

ASME B18.29.1-2010

[Revision of ASME B18.29.1-1993 (R2007)]

Helical Coil Screw Thread Inserts—Free Running and Screw Locking (Inch Series)

AN AMERICAN NATIONAL STANDARD



Three Park Avenue • New York, NY • 10016 USA

Copyright © 2010 by the American Society of Mechanical Engineers.
No reproduction may be made of this material without written consent of ASME.



Date of Issuance: August 16, 2010

This Standard will be revised when the Society approves the issuance of a new edition. There will be no addenda issued to this edition.

ASME issues written replies to inquiries concerning interpretations of technical aspects of this document. Periodically, certain actions of the ASME B18 Committee may be published as Cases. Cases and interpretations are published on the ASME Web site under the Committee Pages at <http://cstools.asme.org> as they are issued.

ASME is the registered trademark of The American Society of Mechanical Engineers.

This code or standard was developed under procedures accredited as meeting the criteria for American National Standards. The Standards Committee that approved the code or standard was balanced to assure that individuals from competent and concerned interests have had an opportunity to participate. The proposed code or standard was made available for public review and comment that provides an opportunity for additional public input from industry, academia, regulatory agencies, and the public-at-large.

ASME does not "approve," "rate," or "endorse" any item, construction, proprietary device, or activity.

ASME does not take any position with respect to the validity of any patent rights asserted in connection with any items mentioned in this document, and does not undertake to insure anyone utilizing a standard against liability for infringement of any applicable letters patent, nor assume any such liability. Users of a code or standard are expressly advised that determination of the validity of any such patent rights, and the risk of infringement of such rights, is entirely their own responsibility.

Participation by federal agency representative(s) or person(s) affiliated with industry is not to be interpreted as government or industry endorsement of this code or standard.

ASME accepts responsibility for only those interpretations of this document issued in accordance with the established ASME procedures and policies, which precludes the issuance of interpretations by individuals.

No part of this document may be reproduced in any form,
in an electronic retrieval system or otherwise,
without the prior written permission of the publisher.

The American Society of Mechanical Engineers
Three Park Avenue, New York, NY 10016-5990

Copyright © 2010 by
THE AMERICAN SOCIETY OF MECHANICAL ENGINEERS
All rights reserved
Printed in U.S.A.



CONTENTS

Foreword	iv
Committee Roster.....	v
Correspondence With the B18 Committee	vi
1 Introductory Notes	1
2 STI Tapped Hole	2
3 Helical Coil Insert.....	2
4 Inspection and Quality Assurance.....	3
Figure	
1 Insert Configuration.....	5
Tables	
1 STI Threaded Hole Data.....	6
2 Chemical Composition	9
3 Insert Length Data.....	10
4 Insert Dimensions.....	12
5 Self-Locking Torque.....	14
Nonmandatory Appendices	
A Insert Length Selection	15
B Screw Thread Insert Taps	16
C STI Thread Plug Gages	17
D Installation	18



FOREWORD

Although this is the first ASME standard covering helical coil screw thread inserts, they have been in use for many years. The helical coil screw thread insert was invented in the 1930s and found initial acceptance in aircraft manufactured and serviced by the Allied Air Forces during World War II.

Since that time, applications for helical coil inserts have come into broad usage in aerospace, automotive, and industrial original equipment design, production salvage (repair), and in-service repair.

Although this usage did include metric spark plug sizes, the regular metric series was delineated in Europe in the 1950s, and came into production in the inch-using countries in the 1960s.

Subcommittee 29, Threaded Inserts, met initially in May 1989 after authorization by the ASME B18 Committee to proceed with development of standards covering screw thread inserts.

Following approval by the B18 Committee, the proposal was submitted to the American National Standards Institute for approval. The 1993 edition was approved by ANSI on February 4, 1993.

In 2008, an update of this Standard was initiated by the ASME B18.29 Subcommittee. After needed revisions and additions were clearly identified, ballots were properly undertaken. Ballots resulted in changes related to the ballot comments. In 2009, this Standard was approved by the B18.29 Subcommittee and the B18 Committee.

This revision was approved by the American National Standards Institute (ANSI) on February 25, 2010.



ASME B18 COMMITTEE

Standardization of Bolts, Nuts, Rivets, Screws, Washers, and Similar Fasteners

(The following is the roster of the Committee at the time of approval of this Standard.)

STANDARDS COMMITTEE OFFICERS

J. Greenslade, *Chair*
D. S. George, *Vice Chair*
R. D. Strong, *Vice Chair*
C. J. Gomez, *Secretary*

STANDARDS COMMITTEE PERSONNEL

V. Cartina, Autocraft Industrial	W. H. Kopke, Consultant
D. A. Clever, Consultant	W. J. Lutkus, Emhart Teknologies
A. P. Cockman, Ford Motor Co.	D. McCrindle, Canadian Fasteners Institute
C. A. Dugal de la Garza, TSP, Inc.	M. D. Prasad, <i>Contributing Member</i> , Global M&F Solutions, Inc.
D. S. George, ND Industries	S. Savoji, ITW Medalist
C. J. Gomez, The American Society of Mechanical Engineers	W. Schevey, <i>Contributing Member</i> , BGM Fastener Co., Inc.
J. Greenslade, Industrial Fasteners Institute	Q. M. Smith III, Oregon DOT
J. J. Grey, <i>Contributing Member</i> , Fastener Consulting Services, Inc.	W. R. Stevens, Ramco
B. Hasiuk, <i>Contributing Member</i> , Defense Supply Center Philadelphia	R. D. Strong, Consultant
A. Herskovitz, Consultant	S. W. Vass, Consultant
J. Hubbard, Leland-Powell Fasteners, Inc.	C. B. Wackrow, MNP Corp.
J. Jennings, <i>Contributing Member</i> , Naval Surface Warfare Center	W. K. Wilcox, Consultant
W. H. King, Porteous Fastener Co.	C. B. Williamson, Fastenal Co.
J. F. Koehl, <i>Contributing Member</i> , Spirol International Corp.	C. J. Wilson, Consultant
	R. B. Wright, <i>Contributing Member</i> , Wright Tool Co.
	J. G. Zeratsky, National Rivet and Manufacturing Co.

SUBCOMMITTEE 29 — THREADED INSERTS

A. L. Guzman, <i>Secretary</i> , The American Society of Mechanical Engineers	A. J. Knudtson, Alcoa Fastening Systems
R. L. Davis, Kato Fastening Systems, Inc.	J. Loconte III, <i>Contributing Member</i> , Alcoa Fastening Systems
D. S. George, ND Industries	W. J. Lutkus, Emhart Teknologies
W. Giannakakos, Black & Decker	J. F. McCarrick, Defense Supply Center Philadelphia
J. Greenslade, Industrial Fasteners Institute	A. Qaqish, Kato Fastening Systems, Inc.
A. Herskovitz, Consultant	Q. M. Smith III, Oregon DOT
J. Jennings, Naval Surface Warfare Center	D. J. Soscia, General Dynamics Electric Boat Corp.
M. Keller, Consultant	R. D. Strong, Consultant
	W. K. Wilcox, Consultant
	C. J. Wilson, Consultant



CORRESPONDENCE WITH THE B18 COMMITTEE

General. ASME standards are developed and maintained with the intent to represent the consensus of concerned interests. As such, users of this Standard may interact with the Committee by requesting interpretations, proposing revisions, and attending Committee meetings. Correspondence should be addressed to:

Secretary, B18 Standards Committee
The American Society of Mechanical Engineers
Three Park Avenue
New York, NY 10016-5990
<http://go.asme.org/Inquiry>

Proposing Revisions. Revisions are made periodically to the Standard to incorporate changes that appear necessary or desirable, as demonstrated by the experience gained from the application of the Standard. Approved revisions will be published periodically.

The Committee welcomes proposals for revisions to this Standard. Such proposals should be as specific as possible, citing the paragraph number(s), the proposed wording, and a detailed description of the reasons for the proposal, including any pertinent documentation.

Proposing a Case. Cases may be issued for the purpose of providing alternative rules when justified, to permit early implementation of an approved revision when the need is urgent, or to provide rules not covered by existing provisions. Cases are effective immediately upon ASME approval and shall be posted on the ASME Committee Web page.

Requests for Cases shall provide a Statement of Need and Background Information. The request should identify the standard, the paragraph, figure or table number(s), and be written as a Question and Reply in the same format as existing Cases. Requests for Cases should also indicate the applicable edition(s) of the standard to which the proposed Case applies.

Interpretations. Upon request, the B18 Standards Committee will render an interpretation of any requirement of the Standard. Interpretations can only be rendered in response to a written request sent to the Secretary of the B18 Standards Committee.

The request for an interpretation should be clear and unambiguous. It is further recommended that the inquirer submit his/her request in the following format:

Subject:	Cite the applicable paragraph number(s) and the topic of the inquiry.
Edition:	Cite the applicable edition of the Standard for which the interpretation is being requested.
Question:	Phrase the question as a request for an interpretation of a specific requirement suitable for general understanding and use, not as a request for an approval of a proprietary design or situation. The inquirer may also include any plans or drawings that are necessary to explain the question; however, they should not contain proprietary names or information.

Requests that are not in this format may be rewritten in the appropriate format by the Committee prior to being answered, which may inadvertently change the intent of the original request.

ASME procedures provide for reconsideration of any interpretation when or if additional information that might affect an interpretation is available. Further, persons aggrieved by an interpretation may appeal to the cognizant ASME Committee or Subcommittee. ASME does not “approve,” “certify,” “rate,” or “endorse” any item, construction, proprietary device, or activity.

Attending Committee Meetings. The B18 Standards Committee regularly holds meetings, which are open to the public. Persons wishing to attend any meeting should contact the Secretary of the B18 Standards Committee.



HELICAL COIL SCREW THREAD INSERTS— FREE RUNNING AND SCREW LOCKING (INCH SERIES)

1 INTRODUCTORY NOTES

1.1 Scope

1.1.1 This Standard delineates the dimensional data for the inch series helical coil screw thread inserts and the threaded holes into which they are installed. Both free-running and screw-locking types having unified fine and unified coarse thread series from size #1 through 1½ in. are covered. Appendices that describe insert selection, STI (screw thread insert) taps, gages and gaging, insert installation, and removal tooling are also included.

1.1.2 The inclusion of dimensional data in this Standard is not intended to imply that all products described are stock sizes. Consumers should consult with manufacturers concerning availability.

1.2 References

The latest editions of the following documents form a part of this Standard to the extent specified herein.

Army A-A-59158, Tools for Inserting and Extracting Helical Coil Wire Screw Thread Inserts

Publisher: IHS Inc., 15 Inverness Way East, Englewood, CO 80112 (www.ihs.com)

ASME B1.1, Unified Inch Screw Threads (UN and UNR Thread Form)

ASME B1.2, Gages and Gaging for Unified Inch Screw Threads

ASME B1.3, Screw Thread Gaging Systems for Acceptability — Inch and Metric Screw Threads (UN, UNR, UNJ, M, and MJ)

ASME B18.18.2, Inspection and Quality Assurance for High-Volume Machine Assembly Fasteners

ASME B46.1, Surface Texture, Surface Roughness, Waviness, and Lay

ASME B47.1, Gage Blanks

ASME B94.9, Taps: Ground and Cut Threads

ASME Y14.5M, Dimensioning and Tolerancing

ASME Y14.36, Surface Texture Symbols

Publisher: The American Society of Mechanical Engineers (ASME), Three Park Avenue, New York, NY 10016; Order Department: 22 Law Drive, P.O. Box 2900, Fairfield, NJ 07007-2900 (www.asme.org)

ASTM E 290, Standard Test Methods for Bend Testing of Material for Ductility

ASTM B 209-02, Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate

ASTM A 370, Standard Test Methods and Definitions for Mechanical Testing of Steel Products

Publisher: American Society for Testing and Materials (ASTM International), 100 Barr Harbor Drive, P.O. Box C700, West Conshohocken, PA 19428 (www.astm.org)

SAE AMS4120, Aluminum Alloy, Rolled or Cold Finished Bars, Rods, and Wire, 4.4Cu-1.5Mg-0.60Mn (2024), Solution Heat Treated and Naturally Aged (T4), Solution Heat Treated, Cold Worked, and Naturally Aged (T351)

SAE AS5272, Lubricant, Solid Film, Heat Cured, Corrosion Inhibiting Procurement Specification

SAE AS8879, Screw Threads — UNJ Profile, Inch Controlled Radius Root with Increased Minor Diameter

SAE J417, Hardness Tests and Hardness Number Conversions.

Publisher: Society of Automotive Engineers (SAE International), 400 Commonwealth Drive, Warrendale, PA 15096-0001 (www.sae.org)

1.3 Description

Helical coil inserts are screw thread bushings coiled from wire of diamond shaped cross-sections. The inserts are screwed into STI tapped holes to form nominal size internal threads. Inserts are installed by torquing through a diametral tang. This tang is notched for removal after installation.

In the free state, the inserts are larger in diameter than the tapped hole into which they are installed. In the assembly operation, the torque applied to the tang reduces the diameter of the leading coil and permits it to enter the tapped thread. The remaining coils are reduced in diameter as they, in turn, are screwed into the tapped hole. When the torque or rotation is stopped, the coils expand with a spring-like action, anchoring the insert in place against the tapped hole.



1.4 Class of Fit

Since helical coil inserts are flexible, the class of fit of the final assembly is a function of the size of the tapped hole. Helical coil STI taps are available for both tolerance Classes 2B and 3B tapped holes. Tolerance Class 2B tapped holes provide maximum production tolerances, but result in lower locking torques when screw locking inserts are used. The higher and more consistent torques given in Table 5 are met by the screw locking inserts when assembled and tested in tolerance Class 3B tapped holes in accordance with section 2.

1.5 Compatibility

Assembled helical coil inserts will mate properly with items having UN external threads in accordance with ASME B1.1. In addition, due to the radius on the crest of the insert at the minor diameter, the assembled insert will mate with UNJ profile external threaded parts with controlled radius root threads per SAE AS8879.

1.6 Types of Inserts

1.6.1 Free-Running. The free-running insert provides a smooth, hard, and free-running thread.

1.6.2 Screw-Locking. The screw-locking insert provides a resilient locking thread produced by a series of chords on one or more of the insert coils.

2 STI TAPPED HOLE

The tapped hole into which the insert is installed shall be in accordance with ASME B1.1, except that diameters are larger to accommodate the wire cross-section of the insert. Dimensions of the STI tapped holes are shown in Table 1 and calculated per Note (3) of Table 1.

2.1 Screw Thread Designation

2.1.1 Designation for Tapped Hole. The drawing note for the STI threaded hole per Table 1 to accept the helical coil insert shall be in accordance with the following example:

EXAMPLE: $\frac{1}{4}$ -20 UNC-2B STI thread 0.430 min. depth, per ASME B18.29.1.

2.1.2 Designation for a Helical Coil Insert. Designation of the helical coil insert on parts lists, spares lists, purchase orders, etc., shall be in accordance with the following examples:

EXAMPLES:

- (1) ASME B18.29.1, $\frac{1}{4}$ -20 UNC 0.375 long helical coil free-running insert.
- (2) ASME B18.29.1, #10-32 UNF 0.380 long helical coil screw-locking insert.

2.1.3 Designation for STI Threaded Hole Including Installed Helical Coil Insert. The drawing note for the STI threaded hole per Table 1, having a helical coil insert

installed, shall be in accordance with the following example:

EXAMPLES:

- (1) $\frac{1}{4}$ -20 UNC-2B STI thread 0.430 deep.
- (2) ASME B18.29.1, $\frac{1}{4}$ -20 UNC 0.375 long helical coil free-running insert.

2.2 Gages and Gaging

Acceptance of the threaded hole is determined by gaging with STI GO, NOT GO (HI), and plain cylindrical gages designed and applied in accordance with System 21 of ASME B1.3 (see Nonmandatory Appendix C).

3 HELICAL COIL INSERT

3.1 Insert Material

Chemical composition of the inserts is austenitic corrosion resistant (stainless) steel within the limits of Table 2.

3.2 Properties

3.2.1 Tensile Strength. Wire, before coiling into inserts, shall have tensile strength not lower than 150,000 psi, determined in accordance with ASTM A 370.

3.2.2 Bending. Wire shall withstand, without cracking, bending in accordance with ASTM E 290 at room temperature through an angle of 180 deg around a diameter equal to twice the cross-sectional dimension of the wire in the plane of the bend.

3.2.3 Workmanship. The formed wire shall be of uniform quality and temper; smooth, clean, free from kinks, waviness, splits, cracks, laps, seams, scale, segregation, and other defects that may impair the serviceability of the insert.

3.3 Coatings

3.3.1 Red Dye Identification. Screw-locking inserts are dyed red for identification. The red dye may completely or partially cover the insert. However, it must be sufficient to identify the insert when it is installed in the tapped hole.

3.3.2 Dry Film Lubricant Coating. When specified, dry film lubricant coating can be applied to helical coil inserts. It shall meet the requirements of para. 3.3.2.1 and para. 3.3.2.2. Color of dry film lubricated insert is dark gray to black.

3.3.2.1 Dry Film Material. The lubricant shall meet the requirements of SAE AS5272, Type I.

3.3.2.2 Thickness. The coating shall be uniformly deposited on the insert with minimum thickness being complete coverage. The maximum thickness shall be the avoidance of "bridging" between coils. Slight fill-in



between closely wound coils that immediately separate as the coils are axially pulled apart by hand, shall not be considered "bridging."

3.4 Configuration and Dimensions

Insert configurations shall be in accordance with Fig. 1, and dimensions shall be in accordance with Tables 3 and 4.

3.4.1 Nominal Length. Each nominal insert size is standardized in five lengths which are multiples of the insert's nominal diameter. These are 1, 1½, 2, 2½, and 3 times nominal diameter.

Each nominal length is the minimum through-hole length (material thickness), without countersink, into which that insert can be installed. The nominal insert length is a reference value and cannot be measured.

3.4.2 Assembled Length. Actual assembled length of the insert equals nominal length minus ½ pitch to minus ¾ pitch, with insert installed in a basic STI threaded hole. It cannot be measured in the insert's free state.

4 INSPECTION AND QUALITY ASSURANCE

Unless otherwise specified by the purchaser, the inspection of inserts shall be in accordance with ASME B18.18.2 with inspection level 3 for a 15-cycle torque test as described in para. 4.2.3.

4.1 Inspection (Nondestructive)

4.1.1 Examination of the Product. Inserts shall be visually examined for conformance with drawings and workmanship requirements in accordance with ASME B18.18.2.

4.1.2 Threads. The inserts, when assembled in STI threaded holes conforming to Table 1, shall form threads conforming to ASME B1.1, tolerance Class 3B or Class 2B except for the locking feature of screw-locking inserts. The assembled insert, both types, shall accept and function with parts having external UNJ threads per SAE AS8879.

NOTE: Accuracy of the finished thread, when the insert is installed, is dependent upon the accuracy of the tapped hole. If the finished tapped hole gages satisfactorily, the installed insert will be within the thread tolerance when the insert meets the requirements of the Standard. It is, therefore, not necessary to gage the installed insert. After the insert is installed, the GO thread plug gage may not enter freely because the insert may not have been fully seated in the tapped hole. However, the insert should become seated after a bolt or screw is installed and tightened.

4.1.3 Tang Removal Notch. The tang removal notch shall be located as shown in Fig. 1 and shall be of such depth that the part may be installed without failure of the tang, and that the tang may be removed, after assembly, without affecting the function of the installed insert.

4.2 Screw-Locking Insert Self-Locking Torque (Destructive) Testing

The screw-locking insert, when assembled in threaded holes conforming to Table 1 and tested in accordance with the following paragraphs, shall provide a frictional lock to retain the bolt threads within the torque limits specified in Table 5.

4.2.1 Torque Test Bolts. Assembled screw-locking inserts shall be torque-tested with bolts in accordance with ASME B1.1, cadmium plated, or have other coating with a similar coefficient of friction and a hardness of 36 HRC to 44 HRC. The bolts selected for this test shall be of sufficient length so the thread run out does not enter the insert and that a minimum of one full thread extends past the end of the insert when the bolt is fully seated. Acceptability of bolt threads shall be determined based on System 22 of ASME B1.3 (see Note below).

NOTE: Until a replacement for cadmium plating on the torque test bolts (as specified in para. 4.2.1) is found, and test data completed, an alternate coating, lubricant, or both, can be used to perform the torque test (values may be different from those obtained using cad plated screws) based on agreement between the customer and the insert supplier.

4.2.2 Torque Test Block. The insert to be tested shall be installed in a Class 3B threaded hole conforming to Table 1 in a test block made from 2024-T4 (SAE AMS4120, ASTM B 209-02) aluminum alloy. After installation, the tang shall be removed. The surface of the test block from which the insert is assembled shall be marked to indicate the radial location where the assembled insert begins.

4.2.3 Torque Test Method. The torque test shall consist of a 15-cycle, room temperature test. A new bolt or screw and a new tapped hole shall be used for each complete 15-cycle test. Bolts must assemble freely, with the fingers, up to the locking coil or coils. The bolt shall be engaged and disengaged from the assembled insert for 15 full installation and removal cycles. The test shall be run at less than 40 rpm to yield a dependable measure of torque and avoid heating of the bolt. A bolt shall be considered fully installed when three threads extend past the end of the locking coils of the insert. The removal cycle shall be considered complete when the locking coils are disengaged.

4.2.3.1 Maximum Locking Torque. Maximum locking torque shall be the highest torque value encountered on any installation or removal cycle and shall not exceed the values specified in Table 5. Maximum locking torque readings shall be taken on the first and seventh installation cycles and on the fifteenth removal cycle.

4.2.3.2 Minimum Breakaway Torque. Minimum breakaway torque shall be the torque required to overcome static friction when 100% of the locking feature is engaged and the bolt or screw is not seated (no axial



load). It shall be recorded at the start of the fifteenth removal cycle. The torque value for any cycle shall be not less than the applicable value shown in Table 5.


4.3 Acceptance

The inserts shall be considered to have failed if, at the completion of any of the tests and inspection, any of the following conditions exist:

- (a) a break or crack in the insert
- (b) installation or removal torque exceeds the maximum locking torque value in Table 5
- (c) breakaway torque less than the values in Table 5
- (d) movement of the insert beyond ± 90 deg relative to the TOP surface when installing or removing the test bolt
- (e) seizure or galling of the insert or test bolt
- (f) tang not broken off which interferes with the test bolt at installation
- (g) tang breaks off during insert installation



Fig. 1 Insert Configuration

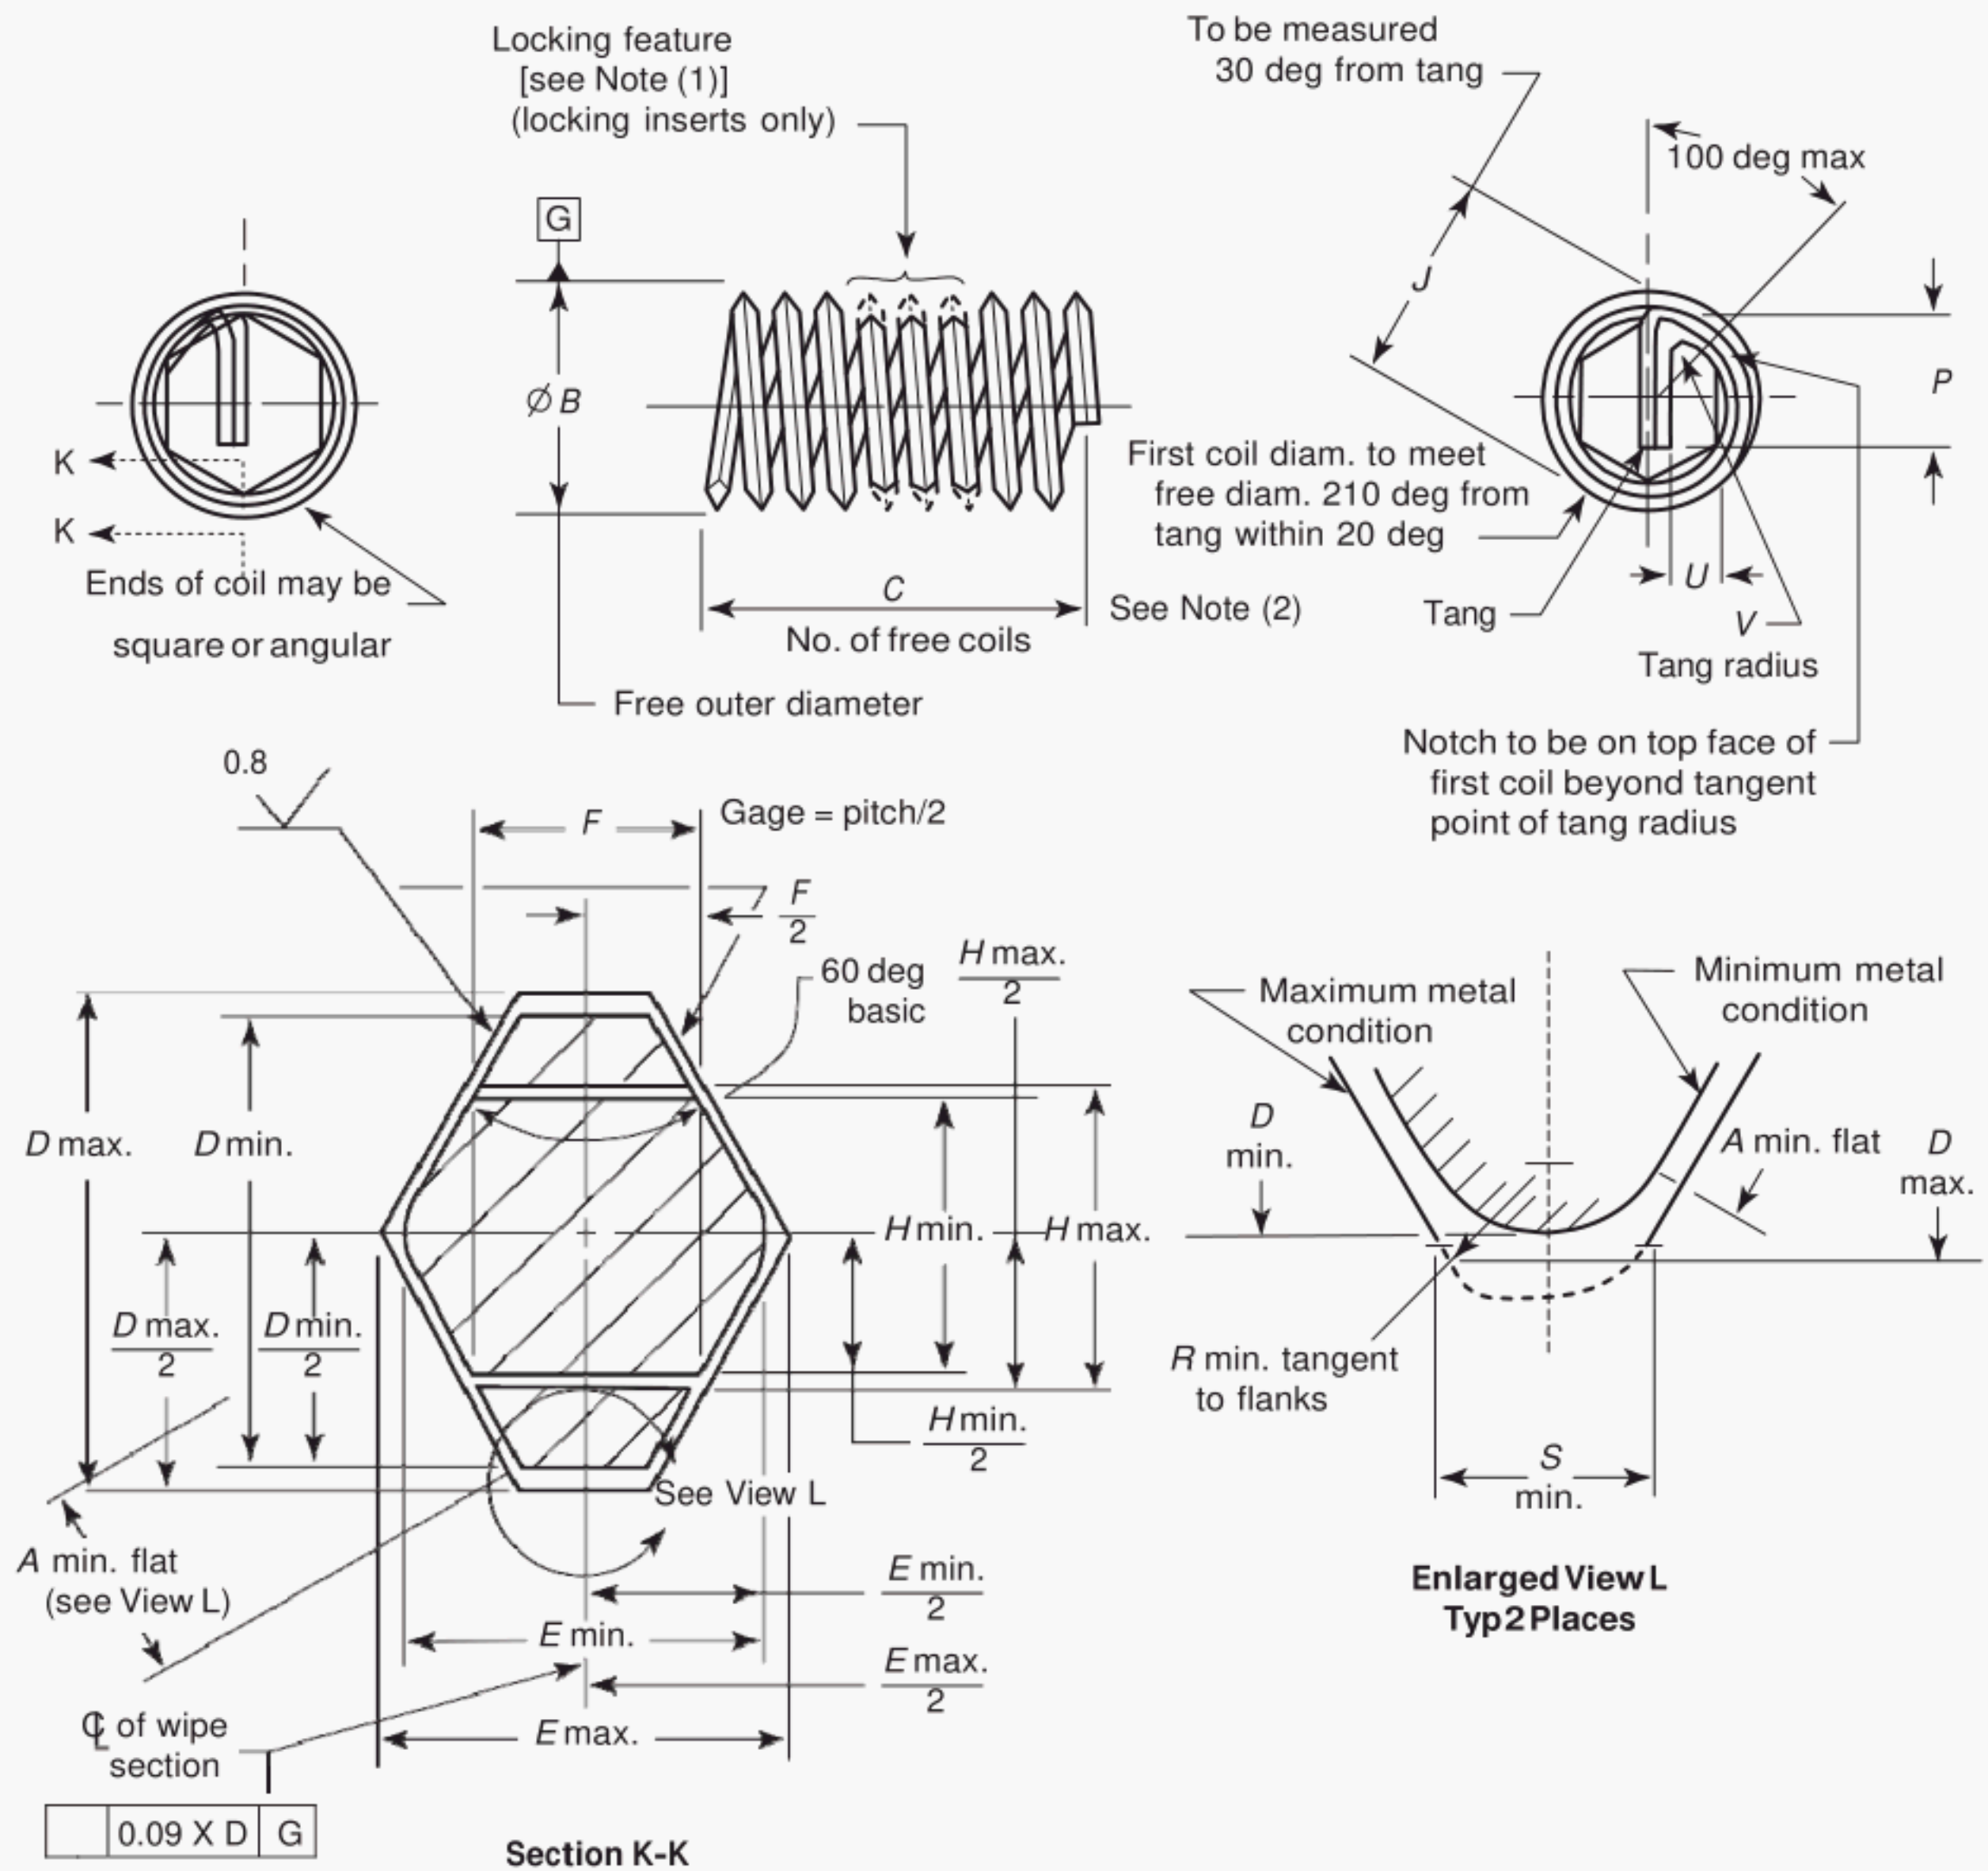


GENERAL NOTES:

- Assembled length of insert to be measured from notch.
- Dimensions apply before supplementary coating (see Tables 4 and 5).
- Surface texture; symbols per ASME Y14.36, requirements per ASME B46.1.
- Dimensions and tolerancing; ASME Y14.5.

NOTES:

- Number of locking coils, spacing of locking coils, number of locking deformations, shape and orientation optional. Locking feature for 1, 1.5, and 2 diameter length inserts symmetrically positioned about the center of insert, and for 2.5 and 3 diameter length inserts at 1 diameter from tang end of insert.
- Number of free coils to be counted from notch.

Table 1 STI Threaded Hole Data

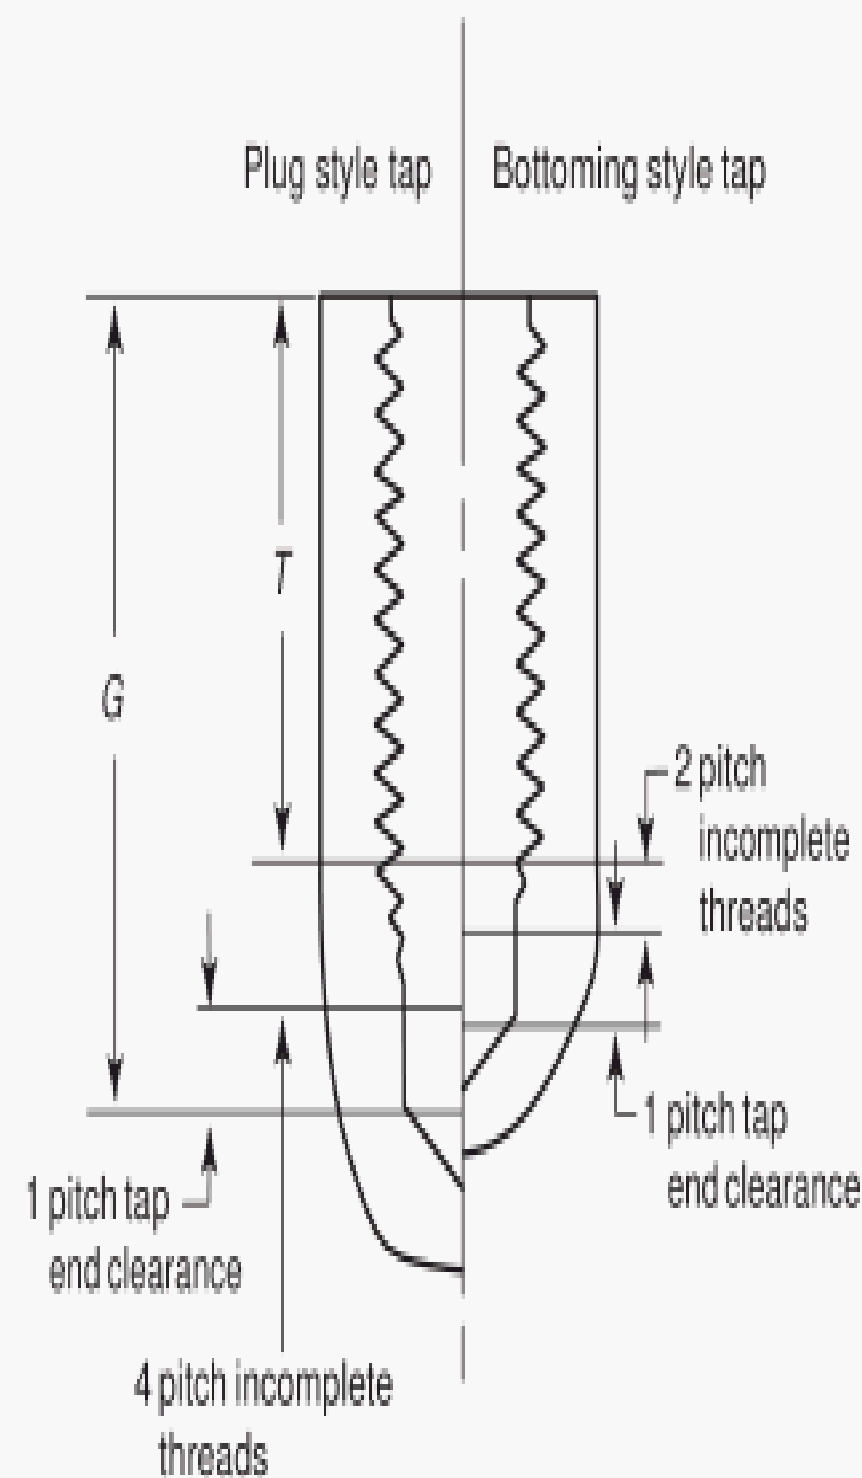

Nominal Thread Size		G Minimum Drilling Depth for Each Insert Length [Note (1)]										Countersink M Diameter		(120 deg ± 5 deg		Pitch Diameter			Min. Major Dia.	T Minimum Tapping Depth [Note (2)]				
		Plug Taps					Bottoming Taps					Including Angle)		Minor Diameter		3B	1D	Dia.		Insert Length				
		1D	1.5D	2D	2.5D	3D	1D	1.5D	2D	2.5D	3D	Min.	Max.	Min.	Max.				Min.	Max.	Max.	2B, 3B	1D	1.5D
Unified Coarse (UNC)																								
1 (0.073)-64		0.203	0.240	0.276	0.313	0.349	0.136	0.172	0.209	0.245	0.282	0.08	0.10	0.0764	0.0823	0.0832	0.0843	0.0850	0.0933	0.090	0.125	0.160	0.200	0.235
2 (0.086)-56		0.236	0.279	0.322	0.365	0.408	0.157	0.200	0.243	0.286	0.329	0.09	0.11	0.0899	0.0961	0.0976	0.0989	0.0995	0.1092	0.100	0.150	0.190	0.230	0.280
3 (0.099)-48		0.273	0.323	0.372	0.422	0.471	0.182	0.232	0.281	0.331	0.380	0.11	0.14	0.1036	0.1104	0.1126	0.1140	0.1148	0.1261	0.120	0.170	0.220	0.270	0.320
4 (0.112)-40		0.318	0.374	0.430	0.486	0.542	0.212	0.268	0.324	0.380	0.436	0.14	0.17	0.1175	0.1252	0.1283	0.1299	0.1308	0.1445	0.140	0.190	0.250	0.310	0.360
5 (0.125)-40		0.338	0.400	0.462	0.525	0.588	0.225	0.288	0.350	0.412	0.475	0.16	0.19	0.1305	0.1373	0.1413	0.1430	0.1438	0.1575	0.150	0.210	0.280	0.340	0.400
6 (0.138)-32		0.394	0.464	0.532	0.602	0.670	0.263	0.332	0.401	0.470	0.539	0.18	0.21	0.1448	0.1527	0.1583	0.1601	0.1611	0.1783	0.170	0.240	0.310	0.380	0.450
8 (0.164)-32		0.434	0.516	0.598	0.680	0.762	0.289	0.371	0.453	0.535	0.617	0.20	0.23	0.1708	0.1781	0.1843	0.1862	0.1872	0.2046	0.200	0.280	0.360	0.440	0.520
10 (0.190)-24		0.535	0.630	0.725	0.820	0.915	0.357	0.452	0.547	0.642	0.737	0.24	0.27	0.1990	0.2080	0.2170	0.2192	0.2203	0.2441	0.230	0.330	0.420	0.520	0.610
12 (0.216)-24		0.574	0.682	0.790	0.898	1.006	0.383	0.491	0.599	0.707	0.815	0.26	0.29	0.2250	0.2340	0.2430	0.2453	0.2464	0.2701	0.260	0.370	0.470	0.580	0.690
1/4 (0.250)-20		0.675	0.800	0.925	1.050	1.175	0.450	0.575	0.700	0.825	0.950	0.31	0.34	0.2608	0.2704	0.2825	0.2851	0.2864	0.3150	0.300	0.430	0.550	0.680	0.800
5/16 (0.3125)-18		0.801	0.957	1.113	1.269	1.425	0.534	0.690	0.846	1.002	1.158	0.38	0.41	0.3245	0.3342	0.3486	0.3515	0.3529	0.3847	0.370	0.530	0.680	0.840	0.990
3/8 (0.375)-16		0.750	0.938	1.125	1.312	1.500	0.625	0.812	1.000	1.188	1.375	0.45	0.48	0.3885	0.3987	0.4156	0.4189	0.4203	0.4562	0.440	0.630	0.810	1.000	1.190
7/16 (0.4375)-14		0.867	1.086	1.305	1.524	1.743	0.724	0.943	1.162	1.381	1.600	0.52	0.55	0.4530	0.4639	0.4839	0.4875	0.4890	0.5303	0.510	0.730	0.950	1.170	1.380
1/2 (0.500)-13		0.962	1.212	1.462	1.712	1.962	0.808	1.058	1.308	1.558	1.808	0.59	0.62	0.5166	0.5273	0.5499	0.5537	0.5554	0.5999	0.580	0.830	1.080	1.330	1.580
9/16 (0.5625)-12		1.062	1.343	1.624	1.905	2.186	0.895	1.176	1.457	1.738	2.019	0.66	0.69	0.5806	0.5918	0.6167	0.6208	0.6225	0.6708	0.650	0.930	1.210	1.490	1.770
5/8 (0.625)-11		1.170	1.483	1.795	2.108	2.420	0.989	1.301	1.614	1.926	2.239	0.73	0.76	0.6447	0.6564	0.6841	0.6885	0.6903	0.7431	0.720	1.030	1.340	1.650	1.970
3/4 (0.750)-10		1.350	1.725	2.100	2.475	2.850	1.150	1.525	1.900	2.275	2.650	0.87	0.90	0.7716	0.7838	0.8149	0.8196	0.8216	0.8799	0.850	1.230	1.600	1.980	2.350
7/8 (0.875)-9		1.542	1.979	2.417	2.854	3.292	1.319	1.757	2.194	2.632	3.069	1.00	1.03	0.8990	0.9119	0.9471	0.9522	0.9543	1.0193	0.990	1.420	1.860	2.300	2.740
1 (1.000)-8		1.750	2.250	2.750	3.250	3.750	1.500	2.000	2.500	3.000	3.500	1.14	1.17	1.0270	1.0421	1.0812	1.0868	1.0890	1.1624	1.130	1.630	2.130	2.630	3.130
1 1/8 (1.125)-7		1.982	2.545	3.107	3.670	4.232	1.696	2.259	2.821	3.384	3.946	1.29	1.32	1.1559	1.1730	1.2178	1.2239	1.2262	1.3106	1.270	1.830	2.390	2.960	3.520





Table 1 STI Threaded Hole Data (Cont'd)

Nominal Thread Size		G Minimum Drilling Depth for Each Insert Length [Note (1)]										Countersink M Diameter		(120 deg ± 5 deg		Pitch Diameter			Min. Major Dia. 2B, 3B	T Minimum Tapping Depth [Note (2)]				
																	Insert Length							
		Plug Taps					Bottoming Taps					Including Angle		Minor Diameter		3B				3B				
		1D	1.5D	2D	2.5D	3D	1D	1.5D	2D	2.5D	3D	Min.	Max.	Min.	Max.	Min.	Max.	Max.		1D	1.5D	2D	2.5D	3D
Unified Coarse (UNC) (Cont'd)																								
1¼(1.250)-7		2.107	2.732	3.357	3.982	4.607	1.821	2.446	3.071	3.696	4.321	1.41	1.44	1.2809	1.2980	1.3428	1.3490	1.3515	1.4356	1.390	2.020	2.640	3.270	3.890
1½(1.375)-6		2.375	3.062	3.750	4.437	5.125	2.042	2.726	3.417	4.104	4.792	1.56	1.59	1.4110	1.4310	1.4832	1.4900	1.4926	1.5915	1.540	2.230	2.920	3.600	4.290
1½(1.500)-6		2.500	3.250	4.000	4.750	5.500	2.167	2.917	3.667	4.417	5.167	1.69	1.72	1.5360	1.5560	1.6082	1.6151	1.6177	1.7165	1.670	2.420	3.170	3.920	4.670
Unified Fine (UNF)																								
2(0.086)-64		0.223	0.266	0.309	0.352	0.395	0.149	0.192	0.235	0.278	0.321	0.09	0.11	0.0894	0.0947	0.0962	0.0974	0.0981	0.1063	0.100	0.145	0.190	0.230	0.275
3(0.099)-56		0.256	0.305	0.355	0.404	0.454	0.170	0.220	0.269	0.319	0.368	0.11	0.14	0.1029	0.1086	0.1106	0.1119	0.1126	0.1222	0.120	0.170	0.220	0.270	0.310
4(0.112)-48		0.293	0.349	0.405	0.461	0.517	0.195	0.251	0.307	0.363	0.419	0.14	0.17	0.1166	0.1229	0.1256	0.1271	0.1279	0.1391	0.130	0.190	0.240	0.300	0.360
6(0.138)-40		0.357	0.426	0.495	0.564	0.633	0.238	0.307	0.376	0.445	0.514	0.17	0.20	0.1435	0.1503	0.1543	0.1560	0.1569	0.1705	0.160	0.230	0.300	0.370	0.440
8(0.164)-36		0.413	0.495	0.577	0.659	0.741	0.275	0.357	0.439	0.521	0.603	0.20	0.23	0.1701	0.1771	0.1821	0.1840	0.1849	0.2001	0.190	0.270	0.360	0.440	0.520
10(0.190)-32		0.472	0.568	0.662	0.758	0.852	0.315	0.410	0.505	0.600	0.695	0.23	0.26	0.1968	0.2041	0.2103	0.2123	0.2133	0.2306	0.220	0.320	0.410	0.510	0.600
¼(0.250)-28		0.589	0.714	0.839	0.964	1.089	0.393	0.518	0.648	0.768	0.893	0.29	0.32	0.2577	0.2646	0.2732	0.2754	0.2765	0.2964	0.290	0.410	0.540	0.660	0.790
⅜(0.3125)-24		0.718	0.874	1.030	1.186	1.342	0.479	0.635	0.791	0.947	1.103	0.36	0.39	0.3215	0.3288	0.3395	0.3421	0.3433	0.3666	0.350	0.510	0.670	0.820	0.980
⅝(0.375)-24		0.625	0.812	1.000	1.187	1.375	0.542	0.729	0.917	1.104	1.292	0.42	0.45	0.3840	0.3910	0.4020	0.4047	0.4059	0.4291	0.420	0.600	0.790	0.980	1.170
⅞(0.4375)-20		0.738	0.957	1.176	1.395	1.614	0.638	0.857	1.076	1.295	1.514	0.50	0.53	0.4483	0.4561	0.4700	0.4731	0.4744	0.5025	0.490	0.710	0.930	1.140	1.360
½(0.500)-20		0.800	1.050	1.300	1.550	1.800	0.700	0.950	1.200	1.450	1.700	0.56	0.59	0.5108	0.5186	0.5325	0.5357	0.5371	0.5650	0.550	0.800	1.050	1.300	1.550
⅜(0.5625)-18		0.895	1.176	1.457	1.738	2.019	0.784	1.065	1.346	1.627	1.908	0.63	0.66	0.5745	0.5826	0.5986	0.6020	0.6035	0.6347	0.620	0.900	1.180	1.460	1.740
⅝(0.625)-18		0.958	1.271	1.583	1.895	2.208	0.847	1.160	1.472	1.785	2.097	0.69	0.72	0.6370	0.6451	0.6611	0.6646	0.6661	0.6972	0.680	0.990	1.310	1.620	1.930
¾(0.750)-16		1.125	1.500	1.875	2.250	2.625	1.000	1.375	1.750	2.125	2.500	0.82	0.85	0.7635	0.7720	0.7906	0.7945	0.7961	0.8312	0.810	1.190	1.560	1.940	2.310
⅞(0.875)-14		1.304	1.741	2.179	2.616	3.054	1.161	1.598	2.036	2.473	2.911	0.96	0.99	0.8905	0.8994	0.9214	0.9257	0.9274	0.9678	0.950	1.380	1.820	2.260	2.700
1(1.000)-12		1.500	2.000	2.500	3.000	3.500	1.333	1.833	2.333	2.833	3.333	1.10	1.13	1.0181	1.0281	1.0542	1.0590	1.0608	1.1083	1.080	1.580	2.080	2.580	3.080
1⅛(1.125)-12		1.625	2.187	2.750	3.312	3.875	1.453	2.021	2.583	3.146	3.708	1.22	1.25	1.1431	1.1531	1.1792	1.1841	1.1860	1.2333	1.210	1.770	2.330	2.900	3.460
1¼(1.250)-12		1.750	2.375	3.000	3.625	4.250	1.583	2.208	2.833	3.458	4.083	1.35	1.38	1.2681	1.2781	1.3042	1.3092	1.3112	1.3583	1.330	1.960	2.580	3.210	3.830
1½(1.375)-12		1.875	2.562	3.250	3.937	4.625	1.708	2.395	3.083	3.771	4.458	1.47	1.50	1.3931	1.4031	1.4292	1.4343	1.4364	1.4833	1.460	2.150	2.830	3.520	4.210
1½(1.500)-12		2.000	2.750	3.500	4.250	5.000	1.833	2.583	3.333	4.083	4.833	1.60	1.63	1.5181	1.5281	1.5542	1.5595	1.5615	1.6083	1.580	2.330	3.080	3.830	4.580
Undefined Special (UNS)																								
1(1.000)-14		1.429	1.929	2.429	2.929	3.429	1.286	1.786	2.286	2.786	3.286	1.08	1.11	1.0155	1.0243	1.0464	1.0508	1.0527	1.0928	1.070	1.570	2.070	2.570	3.070



Table 1 STI Threaded Hole Data (Cont'd)

GENERAL NOTE: Thread diameters are calculated as follows:

(a) *pitch diameter*

$$\begin{aligned} \text{pitch diameter, min. } p &= \text{pitch diameter, min., of nominal thread} + 2 \times H_{\text{max.}} \\ \text{pitch diameter, max. } p &= \text{pitch diameter, max., of nominal thread} + 2 \times H_{\text{min.}} \end{aligned}$$

where $H_{\text{min.}}$ and $H_{\text{max.}}$ are from Table 4 and Fig. 1

(b) *major/minor diameter*

$$\begin{aligned} \text{major diameter, min. } p &= \text{pitch diameter, min.} + 0.649519 \text{ pitch} \\ \text{minor diameter, min. } p &= \text{pitch diameter, min.} - 0.433013 \text{ pitch} \\ \text{minor diameter, max. } p &= \text{minor diameter, min.} + \text{tolerance} \end{aligned}$$

where tolerance is selected from the appropriate table in ASME B1.1 with basic major diameter equal to the minimum major diameter of the STI thread

NOTES:

- (1) The minimum drilling depths allow for
- (a) countersinking the drilled hole to prevent a featheredge at the start of the tapped hole.
 - (b) 0.75 pitch to 1.5 pitch of insert "set-down" to allow for maximum production tolerance.
 - (c) dimensions are shown for both plug and bottoming taps. Plug taps $\frac{5}{16}$ in. and smaller have a male center and the drilled hole depth dimensions allow for this length (one-half of the diameter of the bolt). Calculation of dimension G is as follows:
 - (1) for plug taps $\frac{5}{16}$ in. and smaller,
$$G = \text{insert nominal length} + 0.5 \times \text{bolt nominal diameter} + 4 \text{ pitch (tap chamfer)} + 1 \text{ pitch (tap end clearance)} + 1 \text{ pitch (allowance for countersink and maximum insert set-down)}$$
 - (2) for plug taps $\frac{3}{8}$ in. and larger,
$$G = \text{insert nominal length} + 4 \text{ pitch (tap chamfer)} + 1 \text{ pitch (tap end clearance)} + 1 \text{ pitch (allowance for countersink and maximum insert set-down)}$$
 - (3) for bottoming taps,
$$G = \text{insert nominal length} + 2 \text{ pitch (tap chamfer)} + 1 \text{ pitch (tap end clearance)} + 1 \text{ pitch (allowance for countersink and maximum insert set-down)}$$
- (2) The minimum tapping depth (dimension T) is the minimum for countersink holes with insert set-down of 1.5 pitch maximum (see figure in Table 1). The calculation for dimension T is
- $$T = \text{insert nominal length} + 1 \text{ pitch}$$



Table 2 Chemical Composition

Element	Analysis, %	Check Analysis	
		Under, Min.	Over, Max.
Carbon	0.15 max.	...	0.01
Manganese	2.00 max.	...	0.04
Silicon	1.00 max.	...	0.05
Phosphorous	0.045 max.	...	0.01
Sulphur	0.035 max.	...	0.005
Chromium	17.00 to 20.00	0.20	0.20
Nickel	8.00 to 10.50	0.15	0.15
Molybdenum	0.75 max.	...	0.05
Copper	0.75 max.	...	0.05
Iron	Remainder		

GENERAL NOTE: Suitable grades of material are within the UNS S30000 series.



Table 3 Insert Length Data

Nominal Thread Size	1 × Diameter				1½ × Diameter				2 × Diameter				2½ × Diameter				3 × Diameter			
	Nom- inal	Assembled		C, Ref.	Nom- inal	Assembled		C, Ref.	Nom- inal	Assembled		C, Ref.	Nom- inal	Assembled		C, Ref.	Nom- inal	Assembled		C, Ref.
		Max.	Min.			Max.	Min.			Max.	Min.			Max.	Min.			Max.	Min.	
Unified Coarse (UNC)																				
1 (0.073)-64	0.073	0.065	0.061	2¾	0.110	0.102	0.098	4⅞	0.146	0.138	0.134	6⅞	0.182	0.174	0.170	8⅞	0.219	0.211	0.207	10⅞
2 (0.086)-56	0.086	0.077	0.073	3	0.129	0.120	0.116	5¼	0.172	0.163	0.159	7⅜	0.215	0.206	0.202	9⅝	0.258	0.249	0.245	11⅞
3 (0.099)-48	0.099	0.089	0.083	2⅞	0.148	0.138	0.133	5	0.198	0.188	0.182	7¼	0.248	0.238	0.232	9⅜	0.297	0.287	0.281	11½
4 (0.112)-40	0.112	0.100	0.093	2¾	0.168	0.156	0.149	4¾	0.224	0.212	0.205	6¾	0.280	0.268	0.261	8⅞	0.336	0.324	0.317	10⅞
5 (0.125)-40	0.125	0.113	0.106	3¼	0.188	0.175	0.169	5½	0.250	0.238	0.231	7¼	0.312	0.300	0.293	10	0.375	0.363	0.356	12¼
6 (0.138)-32	0.138	0.122	0.115	2¾	0.207	0.191	0.184	4¾	0.276	0.260	0.253	6⅞	0.345	0.329	0.322	8⅞	0.414	0.398	0.391	10⅞
8 (0.164)-32	0.164	0.148	0.141	3½	0.246	0.230	0.223	6	0.328	0.312	0.305	8⅜	0.410	0.394	0.387	10¾	0.492	0.476	0.469	13¼
10 (0.190)-24	0.190	0.169	0.159	2⅞	0.285	0.264	0.254	5	0.380	0.359	0.349	7⅞	0.475	0.454	0.444	9¼	0.570	0.549	0.539	11⅜
12 (0.216)-24	0.216	0.195	0.185	3½	0.324	0.303	0.293	6	0.432	0.411	0.401	8⅜	0.540	0.519	0.509	10⅝	0.648	0.627	0.617	13⅝
¼ (0.250)-20	0.250	0.225	0.212	3⅜	0.375	0.350	0.338	5¾	0.500	0.475	0.462	8	0.625	0.600	0.588	10⅝	0.750	0.725	0.712	12¾
5/16 (0.3125)-18	0.312	0.284	0.271	4	0.469	0.440	0.427	6⅝	0.625	0.597	0.583	9¼	0.781	0.753	0.740	11⅞	0.938	0.909	0.896	14⅝
⅜ (0.375)-16	0.375	0.344	0.328	4⅜	0.562	0.531	0.516	7¼	0.750	0.718	0.703	10	0.928	0.906	0.891	12⅞	1.125	1.093	1.078	15¾
7/16 (0.4375)-14	0.438	0.402	0.384	4½	0.656	0.621	0.603	7⅜	0.875	0.839	0.821	10¼	1.094	1.058	1.040	13⅝	1.312	1.277	1.259	16⅝
½ (0.500)-13	0.500	0.462	0.442	4⅞	0.750	0.712	0.693	7⅞	1.000	0.962	0.942	11	1.250	1.212	1.192	14⅝	1.500	1.462	1.442	17⅞
9/16 (0.5625)-12	0.562	0.521	0.500	5⅝	0.844	0.802	0.781	8¼	1.125	1.083	1.062	11½	1.406	1.364	1.344	14¾	1.688	1.646	1.625	17⅞
⅝ (0.625)-11	0.625	0.580	0.557	5¼	0.938	0.892	0.869	8½	1.250	1.205	1.182	11¾	1.562	1.517	1.494	15	1.875	1.830	1.807	18⅝
¾ (0.750)-10	0.750	0.700	0.675	5⅞	1.125	1.075	1.050	9⅝	1.500	1.450	1.425	13	1.875	1.825	1.800	16½	2.250	2.000	2.175	20⅝
7/8 (0.875)-9	0.875	0.819	0.792	6¼	1.312	1.257	1.229	10	1.750	1.694	1.667	13¾	2.188	2.132	2.104	17½	2.625	2.569	2.542	21¼
1 (1.000)-8	1.000	0.938	0.906	6⅝	1.500	1.438	1.406	10⅝	2.000	1.938	1.906	14	2.500	2.438	2.406	17¾	3.000	2.938	2.906	21⅝
1⅛ (1.125)-7	1.125	1.054	1.018	6⅝	1.688	1.616	1.580	9⅞	2.250	2.179	2.143	13⅝	2.812	2.741	2.705	17½	3.375	3.304	3.268	21¼
1¼ (1.250)-7	1.250	1.179	1.143	7	1.875	1.804	1.768	11¼	2.500	2.249	2.393	15⅝	3.125	3.054	3.018	19½	3.750	3.697	3.643	23¾
1⅜ (1.375)-6	1.375	1.292	1.250	6½	2.062	1.979	1.938	10½	2.750	2.667	2.625	14⅝	3.438	3.354	3.312	18⅝	4.125	4.402	4.000	22¼
1½ (1.500)-6	1.500	1.417	1.375	7¼	2.250	2.167	2.125	11½	3.000	2.917	2.875	15⅞	3.750	3.667	3.625	20⅝	4.500	4.417	4.375	24½
Unified Fine (UNF)																				
2 (0.086)-64	0.086	0.078	0.074	3½	0.129	0.121	0.117	5⅞	0.172	0.164	0.160	8⅜	0.215	0.207	0.203	10¾	0.258	0.250	0.246	13⅝
3 (0.099)-56	0.099	0.090	0.086	3⅝	0.143	0.139	0.135	5⅝	0.198	0.189	0.185	8	0.248	0.239	0.234	10⅝	0.297	0.288	0.284	12⅝
4 (0.112)-48	0.112	0.102	0.096	3⅝	0.168	0.158	0.152	5⅝	0.224	0.214	0.208	7⅞	0.280	0.270	0.264	10¼	0.336	0.326	0.320	12½
6 (0.138)-40	0.138	0.126	0.119	3½	0.207	0.195	0.188	6	0.276	0.264	0.257	8⅜	0.345	0.333	0.326	10¾	0.414	0.402	0.393	13¼
8 (0.164)-36	0.164	0.150	0.143	3⅞	0.246	0.232	0.225	6½	0.328	0.314	0.307	9⅝	0.410	0.396	0.389	11⅝	0.492	0.554	0.171	14¼
10 (0.190)-32	0.190	0.174	0.167	4⅝	0.285	0.269	0.262	6⅞	0.380	0.364	0.357	9½	0.475	0.459	0.452	12¼	0.570	0.402	0.547	14⅞
¼ (0.250)-28	0.250	0.232	0.223	5	0.375	0.357	0.348	8¼	0.500	0.482	0.473	11⅝	0.625	0.607	0.598	14½	0.750	0.732	0.723	17⅝
5/16 (0.3125)-24	0.312	0.291	0.281	5½	0.469	0.447	0.438	8⅞	0.625	0.604	0.594	12¼	0.781	0.760	0.750	15⅝	0.938	0.916	0.906	19
⅜ (0.375)-24	0.375	0.354	0.344	6⅞	0.562	0.541	0.531	11	0.750	0.729	0.719	15	0.938	0.917	0.906	19⅝	1.125	1.104	1.094	23⅝
7/16 (0.4375)-20	0.438	0.412	0.400	6⅝	0.656	0.631	0.619	10⅝	0.875	0.850	0.838	14⅝	1.094	1.068	1.056	18½	1.312	1.287	1.275	22½





Table 3 Insert Length Data (Cont'd)

Nominal Thread Size	1 x Diameter				1½ × Diameter				2 × Diameter				2½ × Diameter				3 × Diameter			
	Nom- inal	Assembled		C, Ref.	Nom- inal	Assembled		C, Ref.	Nom- inal	Assembled		C, Ref.	Nom- inal	Assembled		C, Ref.	Nom- inal	Assembled		C, Ref.
		Max.	Min.			Max.	Min.			Max.	Min.			Max.	Min.			Max.	Min.	
Unified Fine (UNF) (Cont'd)																				
½ (0.500)-20	0.500	0.475	0.462	7⁄₈	0.750	0.725	0.712	12³⁄₈	1.000	0.975	0.962	16⁷⁄₈	1.250	1.225	1.212	21³⁄₈	1.500	1.475	1.462	25⁷⁄₈
⁹⁄₁₆ (0.5625)-18	0.562	0.534	0.521	8	0.844	0.815	0.802	12½	1.125	1.097	1.083	17½	1.406	1.378	1.365	21¾	1.688	1.659	1.646	26¼
⁵⁄₈ (0.625)-18	0.625	0.597	0.583	9	0.938	0.909	0.896	14½	1.250	1.222	1.208	19¼	1.562	1.534	1.521	24¼	1.875	1.847	1.833	29³⁄₈
¾ (0.750)-16	0.750	0.719	0.703	9¾	1.125	1.094	1.078	15½	1.500	1.469	1.453	20⁵⁄₈	1.875	1.844	1.828	26	2.250	2.218	2.203	31½
⁷⁄₈ (0.875)-14	0.875	0.839	0.821	9⁷⁄₈	1.312	1.276	1.259	15½	1.750	1.714	1.696	21½	2.188	2.151	2.134	26⁵⁄₈	2.625	2.589	2.571	32⅓
1 (1.000)-12	1.000	0.958	0.938	9⁵⁄₈	1.500	1.458	1.438	15	2.000	1.958	1.938	20½	2.500	2.458	2.438	26	3.000	2.958	2.938	31½
1⅛ (1.125)-12	1.125	1.083	1.062	11⅛	1.688	1.645	1.625	17¼	2.250	2.208	2.188	23³⁄₈	2.812	2.770	2.750	29½	3.375	3.333	3.312	35¾
1¼ (1.250)-12	1.250	1.208	1.188	12½	1.875	1.833	1.812	19³⁄₈	2.500	2.458	2.438	26¼	3.125	3.083	3.062	33	3.750	3.708	3.688	39⁷⁄₈
1⅜ (1.375)-12	1.375	1.333	1.312	13¾	2.062	2.020	2.000	21³⁄₈	2.750	2.708	2.688	28⁷⁄₈	3.438	3.395	3.375	36½	4.125	4.083	4.062	44
1½ (1.500)-12	1.500	1.458	1.438	15¼	2.250	2.208	2.188	23½	3.000	2.958	2.938	31⁵⁄₈	3.750	3.708	3.688	39⁷⁄₈	4.500	4.458	4.438	48½
Unified Special (UNS)																				
1 (1.000)-14	1.000	0.964	0.946	11½	1.500	1.464	1.446	17⁷⁄₈	2.000	1.964	1.946	24¼	2.500	2.464	2.446	30⁵⁄₈	3.000	2.964	2.946	37

Table 4 Insert Dimensions

Nominal Thread Size	A Min.	B		D		E		Gage, F	H		J		P		Q, deg	R Min.	S Min.	U		V Max.
		Min.	Max.	Min.	Max.	Min.	Max.		Min.	Max.	Min.	Max.	Min.	Max.				Max.	Min.	
Unified Coarse (UNC)																				
1 (0.073)-64	0.0028	0.095	0.103	0.0139	0.0169	0.0107	0.0137	0.00781	0.00975	0.01015	0.092	0.103	0.055	0.075	75-150	0.0028	0.0049	0.060	0.017	0.010
2 (0.086)-56	0.0033	0.110	0.119	0.0163	0.0193	0.0126	0.0156	0.00893	0.01120	0.01160	0.103	0.111	0.062	0.085	75-150	0.0032	0.0056	0.071	0.025	0.011
3 (0.099)-48	0.0043	0.128	0.139	0.0196	0.0226	0.0152	0.0182	0.01042	0.01313	0.01353	0.120	0.139	0.070	0.090	75-150	0.0038	0.0065	0.085	0.026	0.013
4 (0.112)-40	0.0068	0.144	0.159	0.0241	0.0271	0.0189	0.0219	0.01250	0.01584	0.01624	0.144	0.159	0.070	1.105	25-100	0.0045	0.0078	0.043	0.027	0.013
5 (0.125)-40	0.0068	0.158	0.173	0.0241	0.0271	0.0189	0.0219	0.01250	0.01584	0.01624	0.158	0.173	0.078	0.108	25-100	0.0045	0.0078	0.049	0.029	0.013
6 (0.138)-32	0.0076	0.178	0.193	0.0295	0.0338	0.0233	0.0273	0.01563	0.01985	0.02030	0.178	0.193	0.091	0.135	25-100	0.0056	0.0098	0.055	0.031	0.017
8 (0.164)-32	0.0076	0.205	0.220	0.0295	0.0338	0.0233	0.0273	0.01563	0.01985	0.02030	0.205	0.220	0.117	0.153	20-100	0.0056	0.0098	0.068	0.040	0.019
10 (0.190)-24	0.0120	0.244	0.259	0.0410	0.0449	0.0305	0.0365	0.02083	0.02656	0.02706	0.244	0.259	0.138	0.183	15-90	0.0075	0.0130	0.071	0.040	0.022
12 (0.216)-24	0.0120	0.270	0.285	0.0410	0.0449	0.0305	0.0365	0.02033	0.02656	0.02706	0.270	0.285	0.154	0.189	20-80	0.0075	0.0130	0.084	0.051	0.026
1/4 (0.250)-20	0.0164	0.310	0.330	0.0500	0.0540	0.0378	0.0438	0.02500	0.03198	0.03248	0.310	0.330	0.182	0.238	20-80	0.0090	0.0156	0.094	0.057	0.031
5/16 (0.3125)-18	0.0176	0.380	0.400	0.0560	0.0600	0.0416	0.0486	0.02778	0.03558	0.03608	0.375	0.400	0.214	0.291	20-80	0.0100	0.0174	0.122	0.080	0.032
3/8 (0.375)-16	0.0215	0.452	0.472	0.0636	0.0677	0.0477	0.0547	0.03125	0.04009	0.04059	0.445	0.472	0.269	0.354	20-80	0.0113	0.0195	0.149	0.100	0.032
7/16 (0.4375)-14	0.0267	0.526	0.551	0.0730	0.0770	0.0545	0.0625	0.03571	0.04589	0.04639	0.518	0.551	0.313	0.416	20-80	0.0129	0.0223	0.179	0.115	0.012
1/2 (0.500)-13	0.0273	0.597	0.622	0.0758	0.0829	0.0593	0.0673	0.03846	0.04946	0.04996	0.586	0.622	0.348	0.463	20-80	0.0139	0.0240	0.212	0.140	0.056
9/16 (0.5625)-12	0.0334	0.669	0.694	0.0861	0.0900	0.0649	0.0729	0.04167	0.05363	0.05413	0.656	0.676	0.390	0.521	20-80	0.0150	0.0260	0.234	0.160	0.056
5/8 (0.625)-11	0.0351	0.742	0.767	0.0909	0.0980	0.0715	0.0795	0.04545	0.05855	0.05905	0.727	0.747	0.421	0.572	20-80	0.0164	0.0284	0.267	0.179	0.072
3/4 (0.750)-10	0.0402	0.881	0.906	0.1007	0.1079	0.0795	0.0875	0.05000	0.06445	0.06495	0.840	0.885	0.453	0.640	60-120	0.0180	0.0312	0.331	0.219	0.072
7/8 (0.875)-9	0.0465	1.022	1.052	0.1124	0.1199	0.0892	0.0972	0.05556	0.07167	0.07217	0.991	1.026	0.500	0.734	60-120	0.0200	0.0347	0.385	0.267	0.102
1 (1.000)-8	0.0544	1.166	1.196	0.1264	0.1350	0.1004	0.1094	0.06250	0.08069	0.08119	1.135	1.170	0.526	0.781	60-120	0.0226	0.0391	0.438	0.310	0.106
1 1/8 (1.125)-7	0.0645	1.315	1.355	0.1451	0.1546	0.1160	0.1250	0.07143	0.09229	0.09279	1.260	1.315	0.557	0.843	60-120	0.0258	0.0446	0.480	0.355	0.103
1 1/4 (1.250)-7	0.0645	1.443	1.483	0.1451	0.1546	0.1160	0.1250	0.07143	0.09229	0.09279	1.366	1.416	0.679	0.937	60-120	0.0258	0.0446	0.536	0.424	0.110
1 3/8 (1.375)-6	0.0775	1.598	1.643	0.1695	0.1799	0.1368	0.1458	0.08333	0.10775	0.10825	1.545	1.598	0.689	1.093	60-120	0.0301	0.0521	0.573	0.423	0.112
1 1/2 (1.500)-6	0.0775	1.727	1.772	0.1695	0.1799	0.1368	0.1458	0.08333	0.10775	0.10825	1.676	1.727	0.811	1.187	60-120	0.0301	0.0521	0.661	0.500	0.114
Unified Fine (UNF)																				
2 (0.086)-64	0.0028	0.110	0.119	0.0139	0.0169	0.0107	0.0137	0.00781	0.00975	0.01015	0.103	0.111	0.062	0.080	75-150	0.0028	0.0049	0.069	0.024	0.011
3 (0.099)-56	0.0033	0.131	0.146	0.0163	0.0193	0.0126	0.0156	0.00893	0.01120	0.01160	0.124	0.146	0.072	0.090	75-150	0.0032	0.0056	0.083	0.031	0.012
4 (0.112)-48	0.0043	0.174	0.162	0.0196	0.0226	0.0152	0.0182	0.01042	0.01313	0.01353	0.134	0.162	0.060	0.095	75-150	0.0038	0.0065	0.093	0.034	0.013
6 (0.138)-40	0.0068	0.173	0.193	0.0241	0.0271	0.0189	0.0219	0.01250	0.01584	0.01624	0.173	0.193	0.100	0.130	25-100	0.0045	0.0078	0.057	0.033	0.018
8 (0.164)-36	0.0059	0.204	0.224	0.0261	0.0301	0.0203	0.0243	0.01389	0.01764	0.01804	0.204	0.224	0.117	0.147	20-100	0.0050	0.0087	0.069	0.043	0.019
10 (0.190)-32	0.0076	0.236	0.256	0.0295	0.0338	0.0233	0.0273	0.01563	0.01985	0.02030	0.236	0.256	0.130	0.182	15-90	0.0056	0.0093	0.084	0.058	0.025
1/4 (0.250)-28	0.0085	0.306	0.326	0.0347	0.0387	0.0253	0.0313	0.01786	0.02270	0.02320	0.306	0.326	0.173	0.244	15-70	0.0064	0.0112	0.111	0.071	0.032
5/16 (0.3125)-24	0.0120	0.380	0.400	0.0410	0.0449	0.0305	0.0365	0.02083	0.02656	0.02706	0.359	0.400	0.203	0.291	15-55	0.0075	0.0130	0.138	0.094	0.036
3/8 (0.375)-24	0.0120	0.448	0.468	0.0410	0.0449	0.0305	0.0365	0.02083	0.02656	0.02706	0.422	0.468	0.235	0.353	15-75	0.0075	0.0130	0.169	0.125	0.032
7/16 (0.4375)-20	0.0164	0.524	0.549	0.0500	0.0540	0.0378	0.0438	0.02500	0.03198	0.03248	0.494	0.549	0.281	0.416	15-75	0.0090	0.0156	0.198	0.141	0.042

ASME B18.29.1-2010





Table 4 Insert Dimensions (Cont'd)

Nominal Size	Thread	A Min.	B		D		E		Gage, F	H		J		P		Q, deg	R Min.	S Min.	U		V Max.
			Min.	Max.	Min.	Max.	Min.	Max.		Min.	Max.	Min.	Max.	Min.	Max.				Max.	Min.	
Unified Fine (UNF) (Cont'd)																					
$\frac{1}{2}$	(0.500)-20	0.0164	0.592	0.617	0.0500	0.0540	0.0378	0.0438	0.02500	0.03198	0.03248	0.556	0.617	0.313	0.479	15-75	0.0090	0.0156	0.229	0.172	0.042
$\frac{9}{16}$	(0.5625)-18	0.0176	0.666	0.691	0.0560	0.0600	0.0416	0.0486	0.02778	0.03558	0.03608	0.625	0.691	0.344	0.541	15-75	0.0100	0.0174	0.256	0.196	0.056
$\frac{5}{8}$	(0.625)-18	0.0176	0.733	0.758	0.0560	0.0600	0.0416	0.0486	0.02778	0.03558	0.03608	0.688	0.758	0.375	0.588	15-75	0.0100	0.0174	0.287	0.227	0.072
$\frac{3}{4}$	(0.750)-16	0.0215	0.876	0.901	0.0636	0.0677	0.0477	0.0547	0.03125	0.04009	0.04059	0.820	0.901	0.453	0.562	15-75	0.0113	0.0195	0.345	0.280	0.072
$\frac{7}{8}$	(0.875)-14	0.0267	1.021	1.051	0.0730	0.0770	0.0545	0.0625	0.03571	0.04589	0.04639	0.955	1.051	0.495	0.640	15-75	0.0129	0.0223	0.402	0.330	0.104
1	(1.000)-12	0.0334	1.169	1.199	0.0861	0.0990	0.0649	0.0729	0.04167	0.05363	0.05413	1.094	1.119	0.526	0.728	15-75	0.0150	0.0260	0.450	0.380	0.106
$1\frac{1}{8}$	(1.125)-12	0.0334	1.304	1.334	0.0861	0.0990	0.0649	0.0729	0.04167	0.05363	0.05413	1.219	1.334	0.557	0.819	10-70	0.0150	0.0260	0.523	0.432	0.108
$1\frac{1}{4}$	(1.250)-12	0.0334	1.439	1.469	0.0861	0.0990	0.0649	0.0729	0.04167	0.05363	0.05413	1.344	1.374	0.679	0.941	10-70	0.0150	0.0260	0.589	0.491	0.110
$1\frac{3}{8}$	(1.375)-12	0.0334	1.575	1.610	0.0861	0.0990	0.0649	0.0729	0.04167	0.05363	0.05413	1.469	1.504	0.689	1.001	10-70	0.0150	0.0260	0.652	0.553	0.112
$1\frac{1}{2}$	(1.500)-12	0.0334	1.710	1.745	0.0861	0.0990	0.0649	0.0729	0.04167	0.05363	0.05413	1.594	1.629	0.811	1.123	10-70	0.0150	0.0260	0.718	0.612	0.114
Unified Special (UNS)																					
1	(1.000)-14	0.0267	1.156	1.186	0.0730	0.0770	0.0545	0.0625	0.03571	0.04589	0.04639	1.080	1.186	0.525	0.750	15-75	0.0129	0.0223	0.464	0.382	0.166

Table 5 Self-Locking Torque

Nominal Thread Size	Maximum Locking Torque Installation or Removal	Minimum Breakaway Torque
Unified Coarse (UNC)		
1 (0.073)-64	15.0 ozf-in.	2.0 ozf-in.
2 (0.086)-56	20.0 ozf-in.	3.0 ozf-in.
3 (0.099)-48	32.0 ozf-in.	7.0 ozf-in.
4 (0.112)-40	48.0 ozf-in.	10.0 ozf-in.
5 (0.125)-40	75.2 ozf-in.	13.0 ozf-in.
6 (0.138)-32	6.0 lbf-in.	1.0 lbf-in.
8 (0.164)-32	9.0 lbf-in.	1.5 lbf-in.
10 (0.190)-24	13.0 lbf-in.	2.0 lbf-in.
12 (0.216)-24	24.0 lbf-in.	3.0 lbf-in.
1/4 (0.250)-20	30.0 lbf-in.	4.5 lbf-in.
5/16 (0.3125)-18	60.0 lbf-in.	7.5 lbf-in.
3/8 (0.375)-16	80.0 lbf-in.	12.0 lbf-in.
7/16 (0.4375)-14	100.0 lbf-in.	16.5 lbf-in.
1/2 (0.500)-13	150.0 lbf-in.	24.0 lbf-in.
9/16 (0.5625)-12	200.0 lbf-in.	30.0 lbf-in.
5/8 (0.625)-11	300.0 lbf-in.	40.0 lbf-in.
3/4 (0.750)-10	400.0 lbf-in.	60.0 lbf-in.
7/8 (0.875)-9	600.0 lbf-in.	82.0 lbf-in.
1 (1.000)-8	800.0 lbf-in.	110.0 lbf-in.
1 1/8 (1.125)-7	900.0 lbf-in.	137.0 lbf-in.
1 1/4 (1.250)-7	1,000.0 lbf-in.	165.0 lbf-in.
1 3/8 (1.375)-6	1,150.0 lbf-in.	185.0 lbf-in.
1 1/2 (1.500)-6	1,350.0 lbf-in.	210.0 lbf-in.
Unified Fine (UNF)		
2 (0.086)-64	20.0 ozf-in.	3.0 ozf-in.
3 (0.099)-56	32.0 ozf-in.	7.0 ozf-in.
4 (0.112)-48	48.0 ozf-in.	10.0 ozf-in.
6 (0.138)-40	6.0 lbf-in.	1.0 lbf-in.
8 (0.164)-36	9.0 lbf-in.	1.5 lbf-in.
10 (0.190)-32	13.0 lbf-in.	2.0 lbf-in.
1/4 (0.250)-28	30.0 lbf-in.	3.0 lbf-in.
5/16 (0.3125)-24	60.0 lbf-in.	6.5 lbf-in.
3/8 (0.375)-24	80.0 lbf-in.	9.5 lbf-in.
7/16 (0.4375)-20	100.0 lbf-in.	14.0 lbf-in.
1/2 (0.500)-20	150.0 lbf-in.	18.0 lbf-in.
9/16 (0.5625)-18	200.0 lbf-in.	24.0 lbf-in.
5/8 (0.625)-18	300.0 lbf-in.	32.0 lbf-in.
3/4 (0.750)-16	400.0 lbf-in.	50.0 lbf-in.
7/8 (0.875)-14	600.0 lbf-in.	70.0 lbf-in.
1 (1.000)-12	800.0 lbf-in.	90.0 lbf-in.
1 1/8 (1.125)-12	900.0 lbf-in.	117.0 lbf-in.
1 1/4 (1.250)-12	1,000.0 lbf-in.	143.0 lbf-in.
1 3/8 (1.375)-12	1,150.0 lbf-in.	165.0 lbf-in.
1 1/2 (1.500)-12	1,350.0 lbf-in.	190.0 lbf-in.
Unified Special (UNS)		
1 (1.000)-14	800.0 lbf-in.	90.0 lbf-in.



NONMANDATORY APPENDIX A

INSERT LENGTH SELECTION

A-1 ENGAGED LENGTH OF BOLT

Normally, the engaged length of bolt in an insert is determined by strength considerations.

A-2 MATERIAL STRENGTHS

The standard engineering practice of balancing the tensile strength of the bolt material against the shear strength of the parent or boss material also applies to helical coil inserts. Tables A-1 and A-2 will aid in developing the full load value of the bolt rather than stripping the parent or tapped material.

In using these tables, the following factors must be considered:

(a) The parent material shear strengths are for room temperature. Elevated temperatures call for significant shear value reductions; compensation should be made when required. Shear values are appropriate because the parent material is subject to shearing stress at the major diameter of the tapped threads.

(b) When parent material shear strength falls between two tabulated values, use the lower of the two.

(c) Bolt thread length, overall length, insert length, and full tapped thread depth must be adequate to insure full thread engagement when assembled in order to comply with its design function.

Table A-1 Insert Length Selection

Parent Material Shear Strength, psi	Bolt Designation				
	SAE J429, Grade 2	SAE J429, Grade 5 1 in. and Less	SAE J429, Grade 5 Over 1 in.	SAE J429, Grade 8	ASTM A 574, Socket Head Cap Screw
	Insert Length in Terms of Diameters				
15,000	2½	3	3
20,000	2	2½	2½	3	...
25,000	1½	2	2	2½	3
30,000	1½	2	1½	2	2½
40,000	1	1½	1½	1½	2
50,000	1	1	1	1½	1½

Table A-2 Hardness Number Conversion

Bolt Property Class	Maximum Rockwell Hardness	Maximum Tensile Strength, psi
SAE Grade 2	B100	117,000
SAE Grade 5, 1 in. and smaller	34 HRC	153,000
SAE Grade 5, over 1 in.	30 HRB	138,000
SAE Grade 8	39 HRC	176,000
Socket head cap screw	45 HRC	215,000

GENERAL NOTE: Bolt strength upon which insert length recommendations are based are developed by taking the maximum hardness allowed and the equivalent tensile strength from SAE J417, Hardness Tests and Hardness Number Conversions. These are shown in Table A-2.



NONMANDATORY APPENDIX B SCREW THREAD INSERT TAPS

B-1 SCOPE

This Appendix covers design and dimensions for taps for producing inch series STI threaded holes required for the installation of helical coil screw thread inserts. Threaded hole dimensions are shown in Table 1.

B-2 NOMENCLATURE

Helical coil screw thread insert taps are identified by the designation STI.

B-3 DESIGNS AND DIMENSIONS

B-3.1 Types of Taps

Various types and styles of STI taps are available. General dimensions and tolerances are in accordance with ASME B94.9.

B-3.2 Tap Thread Limits

Ground thread taps are recommended for screw thread inserts. Tap thread limits are in accordance with ASME B94.9. The basic pitch diameter used in determining values is the "Pitch Diameter, Min." in Table 1.

B-4 MARKING

Taps are marked in accordance with ASME B94.9.

EXAMPLE: $\frac{1}{4}$ -28 STI NF HS G H2

Other information may be added at the discretion of the manufacturer.



NONMANDATORY APPENDIX B

SCREW THREAD INSERT TAPS

B-1 SCOPE

This Appendix covers design and dimensions for taps for producing inch series STI threaded holes required for the installation of helical coil screw thread inserts. Threaded hole dimensions are shown in Table 1.

B-2 NOMENCLATURE

Helical coil screw thread insert taps are identified by the designation STI.

B-3 DESIGNS AND DIMENSIONS

B-3.1 Types of Taps

Various types and styles of STI taps are available. General dimensions and tolerances are in accordance with ASME B94.9.

B-3.2 Tap Thread Limits

Ground thread taps are recommended for screw thread inserts. Tap thread limits are in accordance with ASME B94.9. The basic pitch diameter used in determining values is the "Pitch Diameter, Min." in Table 1.

B-4 MARKING

Taps are marked in accordance with ASME B94.9.

EXAMPLE: $\frac{1}{4}$ -28 STI NF HS G H2

Other information may be added at the discretion of the manufacturer.



NONMANDATORY APPENDIX B SCREW THREAD INSERT TAPS

B-1 SCOPE

This Appendix covers design and dimensions for taps for producing inch series STI threaded holes required for the installation of helical coil screw thread inserts. Threaded hole dimensions are shown in Table 1.

B-2 NOMENCLATURE

Helical coil screw thread insert taps are identified by the designation STI.

B-3 DESIGNS AND DIMENSIONS

B-3.1 Types of Taps

Various types and styles of STI taps are available. General dimensions and tolerances are in accordance with ASME B94.9.

B-3.2 Tap Thread Limits

Ground thread taps are recommended for screw thread inserts. Tap thread limits are in accordance with ASME B94.9. The basic pitch diameter used in determining values is the "Pitch Diameter, Min." in Table 1.

B-4 MARKING

Taps are marked in accordance with ASME B94.9.

EXAMPLE: $\frac{1}{4}$ -28 STI NF HS G H2

Other information may be added at the discretion of the manufacturer.



NONMANDATORY APPENDIX B SCREW THREAD INSERT TAPS

B-1 SCOPE

This Appendix covers design and dimensions for taps for producing inch series STI threaded holes required for the installation of helical coil screw thread inserts. Threaded hole dimensions are shown in Table 1.

B-2 NOMENCLATURE

Helical coil screw thread insert taps are identified by the designation STI.

B-3 DESIGNS AND DIMENSIONS

B-3.1 Types of Taps

Various types and styles of STI taps are available. General dimensions and tolerances are in accordance with ASME B94.9.

B-3.2 Tap Thread Limits

Ground thread taps are recommended for screw thread inserts. Tap thread limits are in accordance with ASME B94.9. The basic pitch diameter used in determining values is the "Pitch Diameter, Min." in Table 1.

B-4 MARKING

Taps are marked in accordance with ASME B94.9.

EXAMPLE: $\frac{1}{4}$ -28 STI NF HS G H2

Other information may be added at the discretion of the manufacturer.



NONMANDATORY APPENDIX B SCREW THREAD INSERT TAPS

B-1 SCOPE

This Appendix covers design and dimensions for taps for producing inch series STI threaded holes required for the installation of helical coil screw thread inserts. Threaded hole dimensions are shown in Table 1.

B-2 NOMENCLATURE

Helical coil screw thread insert taps are identified by the designation STI.

B-3 DESIGNS AND DIMENSIONS

B-3.1 Types of Taps

Various types and styles of STI taps are available. General dimensions and tolerances are in accordance with ASME B94.9.

B-3.2 Tap Thread Limits

Ground thread taps are recommended for screw thread inserts. Tap thread limits are in accordance with ASME B94.9. The basic pitch diameter used in determining values is the "Pitch Diameter, Min." in Table 1.

B-4 MARKING

Taps are marked in accordance with ASME B94.9.

EXAMPLE: $\frac{1}{4}$ -28 STI NF HS G H2

Other information may be added at the discretion of the manufacturer.



NONMANDATORY APPENDIX B SCREW THREAD INSERT TAPS

B-1 SCOPE

This Appendix covers design and dimensions for taps for producing inch series STI threaded holes required for the installation of helical coil screw thread inserts. Threaded hole dimensions are shown in Table 1.

B-2 NOMENCLATURE

Helical coil screw thread insert taps are identified by the designation STI.

B-3 DESIGNS AND DIMENSIONS

B-3.1 Types of Taps

Various types and styles of STI taps are available. General dimensions and tolerances are in accordance with ASME B94.9.

B-3.2 Tap Thread Limits

Ground thread taps are recommended for screw thread inserts. Tap thread limits are in accordance with ASME B94.9. The basic pitch diameter used in determining values is the "Pitch Diameter, Min." in Table 1.

B-4 MARKING

Taps are marked in accordance with ASME B94.9.

EXAMPLE: $\frac{1}{4}$ -28 STI NF HS G H2

Other information may be added at the discretion of the manufacturer.



NONMANDATORY APPENDIX B SCREW THREAD INSERT TAPS

B-1 SCOPE

This Appendix covers design and dimensions for taps for producing inch series STI threaded holes required for the installation of helical coil screw thread inserts. Threaded hole dimensions are shown in Table 1.

B-2 NOMENCLATURE

Helical coil screw thread insert taps are identified by the designation STI.

B-3 DESIGNS AND DIMENSIONS

B-3.1 Types of Taps

Various types and styles of STI taps are available. General dimensions and tolerances are in accordance with ASME B94.9.

B-3.2 Tap Thread Limits

Ground thread taps are recommended for screw thread inserts. Tap thread limits are in accordance with ASME B94.9. The basic pitch diameter used in determining values is the "Pitch Diameter, Min." in Table 1.

B-4 MARKING

Taps are marked in accordance with ASME B94.9.

EXAMPLE: $\frac{1}{4}$ -28 STI NF HS G H2

Other information may be added at the discretion of the manufacturer.



NONMANDATORY APPENDIX B SCREW THREAD INSERT TAPS

B-1 SCOPE

This Appendix covers design and dimensions for taps for producing inch series STI threaded holes required for the installation of helical coil screw thread inserts. Threaded hole dimensions are shown in Table 1.

B-2 NOMENCLATURE

Helical coil screw thread insert taps are identified by the designation STI.

B-3 DESIGNS AND DIMENSIONS

B-3.1 Types of Taps

Various types and styles of STI taps are available. General dimensions and tolerances are in accordance with ASME B94.9.

B-3.2 Tap Thread Limits

Ground thread taps are recommended for screw thread inserts. Tap thread limits are in accordance with ASME B94.9. The basic pitch diameter used in determining values is the "Pitch Diameter, Min." in Table 1.

B-4 MARKING

Taps are marked in accordance with ASME B94.9.

EXAMPLE: $\frac{1}{4}$ -28 STI NF HS G H2

Other information may be added at the discretion of the manufacturer.



NONMANDATORY APPENDIX B SCREW THREAD INSERT TAPS

B-1 SCOPE

This Appendix covers design and dimensions for taps for producing inch series STI threaded holes required for the installation of helical coil screw thread inserts. Threaded hole dimensions are shown in Table 1.

B-2 NOMENCLATURE

Helical coil screw thread insert taps are identified by the designation STI.

B-3 DESIGNS AND DIMENSIONS

B-3.1 Types of Taps

Various types and styles of STI taps are available. General dimensions and tolerances are in accordance with ASME B94.9.

B-3.2 Tap Thread Limits

Ground thread taps are recommended for screw thread inserts. Tap thread limits are in accordance with ASME B94.9. The basic pitch diameter used in determining values is the "Pitch Diameter, Min." in Table 1.

B-4 MARKING

Taps are marked in accordance with ASME B94.9.

EXAMPLE: $\frac{1}{4}$ -28 STI NF HS G H2

Other information may be added at the discretion of the manufacturer.



NONMANDATORY APPENDIX B SCREW THREAD INSERT TAPS

B-1 SCOPE

This Appendix covers design and dimensions for taps for producing inch series STI threaded holes required for the installation of helical coil screw thread inserts. Threaded hole dimensions are shown in Table 1.

B-2 NOMENCLATURE

Helical coil screw thread insert taps are identified by the designation STI.

B-3 DESIGNS AND DIMENSIONS

B-3.1 Types of Taps

Various types and styles of STI taps are available. General dimensions and tolerances are in accordance with ASME B94.9.

B-3.2 Tap Thread Limits

Ground thread taps are recommended for screw thread inserts. Tap thread limits are in accordance with ASME B94.9. The basic pitch diameter used in determining values is the "Pitch Diameter, Min." in Table 1.

B-4 MARKING

Taps are marked in accordance with ASME B94.9.

EXAMPLE: $\frac{1}{4}$ -28 STI NF HS G H2

Other information may be added at the discretion of the manufacturer.



NONMANDATORY APPENDIX B SCREW THREAD INSERT TAPS

B-1 SCOPE

This Appendix covers design and dimensions for taps for producing inch series STI threaded holes required for the installation of helical coil screw thread inserts. Threaded hole dimensions are shown in Table 1.

B-2 NOMENCLATURE

Helical coil screw thread insert taps are identified by the designation STI.

B-3 DESIGNS AND DIMENSIONS

B-3.1 Types of Taps

Various types and styles of STI taps are available. General dimensions and tolerances are in accordance with ASME B94.9.

B-3.2 Tap Thread Limits

Ground thread taps are recommended for screw thread inserts. Tap thread limits are in accordance with ASME B94.9. The basic pitch diameter used in determining values is the "Pitch Diameter, Min." in Table 1.

B-4 MARKING

Taps are marked in accordance with ASME B94.9.

EXAMPLE: $\frac{1}{4}$ -28 STI NF HS G H2

Other information may be added at the discretion of the manufacturer.



NONMANDATORY APPENDIX B SCREW THREAD INSERT TAPS

B-1 SCOPE

This Appendix covers design and dimensions for taps for producing inch series STI threaded holes required for the installation of helical coil screw thread inserts. Threaded hole dimensions are shown in Table 1.

B-2 NOMENCLATURE

Helical coil screw thread insert taps are identified by the designation STI.

B-3 DESIGNS AND DIMENSIONS

B-3.1 Types of Taps

Various types and styles of STI taps are available. General dimensions and tolerances are in accordance with ASME B94.9.

B-3.2 Tap Thread Limits

Ground thread taps are recommended for screw thread inserts. Tap thread limits are in accordance with ASME B94.9. The basic pitch diameter used in determining values is the "Pitch Diameter, Min." in Table 1.

B-4 MARKING

Taps are marked in accordance with ASME B94.9.

EXAMPLE: $\frac{1}{4}$ -28 STI NF HS G H2

Other information may be added at the discretion of the manufacturer.



NONMANDATORY APPENDIX B SCREW THREAD INSERT TAPS

B-1 SCOPE

This Appendix covers design and dimensions for taps for producing inch series STI threaded holes required for the installation of helical coil screw thread inserts. Threaded hole dimensions are shown in Table 1.

B-2 NOMENCLATURE

Helical coil screw thread insert taps are identified by the designation STI.

B-3 DESIGNS AND DIMENSIONS

B-3.1 Types of Taps

Various types and styles of STI taps are available. General dimensions and tolerances are in accordance with ASME B94.9.

B-3.2 Tap Thread Limits

Ground thread taps are recommended for screw thread inserts. Tap thread limits are in accordance with ASME B94.9. The basic pitch diameter used in determining values is the "Pitch Diameter, Min." in Table 1.

B-4 MARKING

Taps are marked in accordance with ASME B94.9.

EXAMPLE: $\frac{1}{4}$ -28 STI NF HS G H2

Other information may be added at the discretion of the manufacturer.



NONMANDATORY APPENDIX B SCREW THREAD INSERT TAPS

B-1 SCOPE

This Appendix covers design and dimensions for taps for producing inch series STI threaded holes required for the installation of helical coil screw thread inserts. Threaded hole dimensions are shown in Table 1.

B-2 NOMENCLATURE

Helical coil screw thread insert taps are identified by the designation STI.

B-3 DESIGNS AND DIMENSIONS

B-3.1 Types of Taps

Various types and styles of STI taps are available. General dimensions and tolerances are in accordance with ASME B94.9.

B-3.2 Tap Thread Limits

Ground thread taps are recommended for screw thread inserts. Tap thread limits are in accordance with ASME B94.9. The basic pitch diameter used in determining values is the "Pitch Diameter, Min." in Table 1.

B-4 MARKING

Taps are marked in accordance with ASME B94.9.

EXAMPLE: $\frac{1}{4}$ -28 STI NF HS G H2

Other information may be added at the discretion of the manufacturer.

